

CCS2 - CHAdeMO

CCS2 to CHAdeMO adapter



front



after



top




bottom



side

Parameter/specification sheet


Rated current:250A Max	Conductor: copper alloy, silver plated surface
Rated voltage:1000VDC Max	Working environment temperature related: -30°C- +50°C
Contact impedance:0.5 mΩ Max	Terminal temperature rise: <50K
Fireproof grade of rubber shell:UL94V-0	Insertion and Extraction Force: <100N
Waterproof grade: IP54(mating)	weight: 1.83kg
Plastic shell: thermoplastic plastic	size: 301.43*150.03*95mm

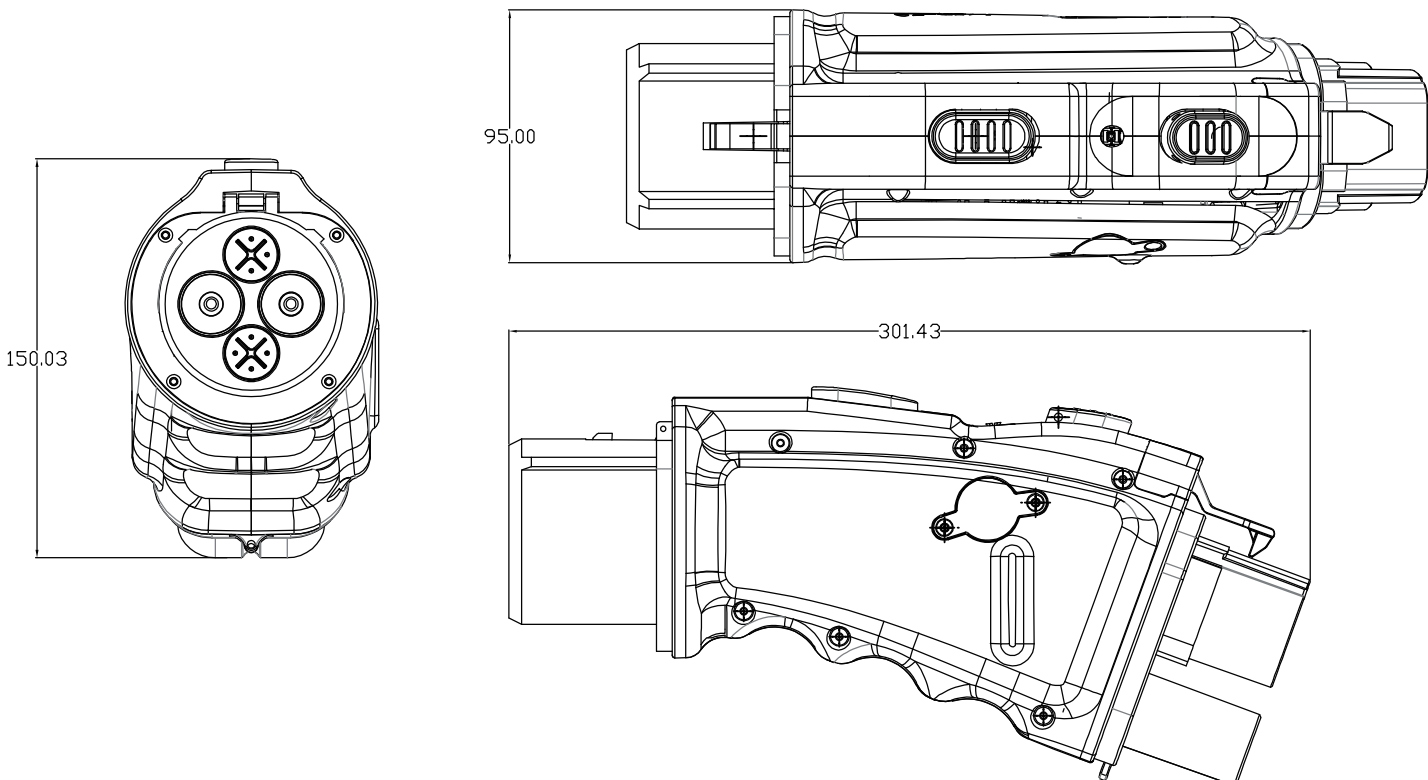


usage method



Box specifications/weight, quantity, size

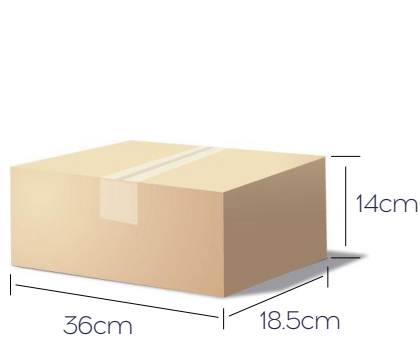

Weight 2.33kgs/Quantity 1 piece

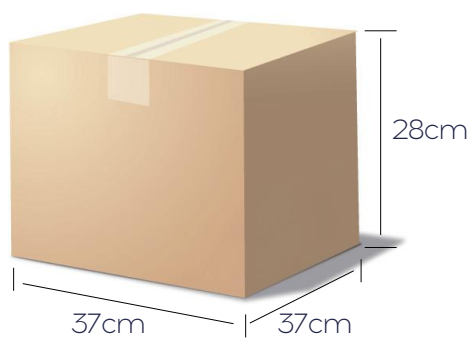

Weight 9.32kgs/Quantity 4 piece

Product packaging

